


# SPECTRUM TRANSCEIVER

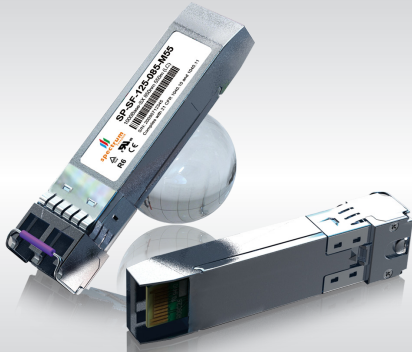

## SP-SF-10G-850-003-DC

### 10G SFP+ Small Form Pluggable Plus

#### FEATURES

- Compliant with SFP+ MSA Specification, RoHS.
- Operating data rate up to 10.3Gbps
- Up to 300m on 50/125um MMF(2GHz/Km).
- 850nm VCSEL Transmitter.
- Single +3.3V Power Supply and TTL Logic Interface.
- Duplex LC Connector Interface.
- Hot Pluggable.
- Compliant with IEEE 802.3ae 10GBASE-SR.
- Compliant with IEEE 802.3ae 10GBASE-SW.
- Compliant to IEC 60825 Class 1.

#### APPLICATIONS

- 10GBASE-SR at 9.953Gbps.
- 10GBASE-SW at 10.3125Gbps.
- Other Optical Links.

#### SPECIFICATIONS

##### a) Electrical and Optical Characteristics

Parameter	Symbol	Min.	Typical	Max.	Unit	Note
50/125um MMF			300		m	
Data Rate			10.3125		Gbps	
Transmitter						
Centre Wavelength	$\lambda_c$	840	850	860	nm	
Spectral Width (RMS)	$\Delta\lambda$			0.45	nm	
Average Output Power	$P_{out}$	-6		-1	dBm	
Extinction Ratio	ER	3.0	5.0		dB	
Output Optical Eye			IEEE 802.3-2005 Compliant			
Transmitter and Dispersion Penalty	TDP			3.9	dB	
Input Differential Impedance	$Z_{IN}$	90	100	110	$\Omega$	
TX Disable (Disable)		2.0		$V_{cc}+0.3$	V	
TX Disable (Enable)		0		0.8	V	
TX_Fault (Fault)		2.0		$V_{cc}+0.3$	V	
TX_Fault (Normal)		0		0.8	V	
TX_Disable Assert Time	$t_{off}$			10	us	
Receiver						
Centre Wavelength	$\lambda_c$	840	850	860	nm	
Receiver Sensitivity in OMA	$P_{min}$			-11.1	dBm	
Output Differential Impedance	$Z_{OUT}$	90	100	110	$\Omega$	
Receiver Overload	$P_{max}$	-1			dBm	
Optical Return Loss	ORL			-12	dB	
LOS De-Assert	LOSD			-15	dBm	
LOS Assert	LOSA	-25			dBm	
LOS Hysteresis		0.5			dB	
LOS (High)		2.0		$V_{cc}+0.3$	V	
LOS (Low)		0		0.8	V	

For enquires, please email to [info@terrabitnetworks.com](mailto:info@terrabitnetworks.com)

# SPECTRUM TRANSCEIVER

## b) Absolute Maximum Ratings

Parameter	Symbol	Min.	Max.	Unit
Storage Temperature	T <sub>ST</sub>	-40	+85	°C
Supply Voltage	V <sub>CC</sub>	-0.5	3.6	V


## c) Recommended Operating Environment

Parameter	Symbol	Min.	Typical	Max.	Unit	Note
Power Supply Voltage	V <sub>CC</sub>	+3.15	+3.3	+3.45	V	
Power Supply Current	I <sub>CC</sub>			300	mA	
Operating Temperature	T <sub>OP</sub>	0	-	+70	°C	
Surge Current	I <sub>Surge</sub>			+30	mA	
Baud Rate			10.3125		GBaud	

## d) Performance Specifications - Electrical

Parameter	Symbol	Min.	Typical	Max.	Unit	Note
Transmitter						
CML Inputs (Differential)	V <sub>in</sub>	150		1200	mVpp	AC coupled inputs
Input Impedance (Differential)	Z <sub>in</sub>	85	100	115	Ohms	R <sub>in</sub> > 100 kohms @ DC
Tx_DISABLE Input Voltage - High		2		V <sub>cc</sub> +0.3	V	
Tx_DISABLE Input Voltage - Low		0		0.8	V	
Tx_FAULT Output Voltage - High		2		V <sub>cc</sub> +0.3	V	I <sub>o</sub> = 400µA; Host V <sub>cc</sub>
Tx_FAULT Output Voltage - Low		0		0.8	V	I <sub>o</sub> = -4.0mA
Receiver						
CML Outputs (Differential)	V <sub>out</sub>	350		700	mVpp	AC coupled outputs
Outputs Impedance (Differential)	Z <sub>out</sub>	85	100	115	Ohms	
Rx_LOS Output Voltage - High		2		V <sub>cc</sub> +0.3	V	I <sub>o</sub> = 400µA; Host V <sub>cc</sub>
Rx_LOS Output Voltage - Low		0		0.8	V	I <sub>o</sub> = -4.0mA
MOD_DEF (0:2)	V <sub>oH</sub>	2.5			V	With Serial ID
MOD_DEF (0:2)	V <sub>oL</sub>	0		0.5	V	With Serial ID

## e) Pin Assignment

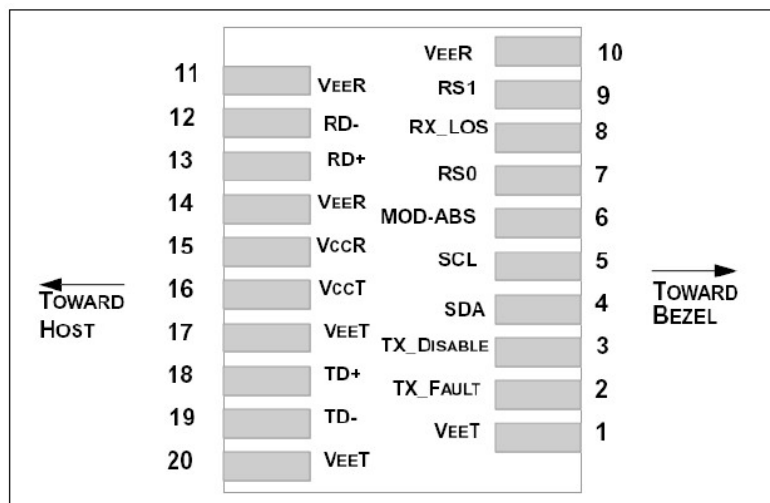

Pin out of Connector Block on Host Board

# SPECTRUM TRANSCEIVER

## f) Pin Description

Pin Num.	Name	Function	Plug Seq.	Notes
1	VeeT	Transmitter Ground	1	
2	TX Fault	Transmitter Fault Indicator	3	1
3	TX Disable	Transmitter Disable	3	2, Module disables on high or open
4	SDA	Module Definition 2	3	Note 3, Data line for Serial ID
5	SCL	Module Definition 1	3	Note 3, Data line for Serial ID
6	MOD-ABS	Module Definition 0	3	Note 3, Grounded within the module
7	RS0	RX Rate Select (LVTTL).	3	This pin has an internal 30k pull down to ground. A signal on this pin will not affect module performance
8	LOS	Loss of Signal	3	Note 4
9	RS1	TX Rate Select (LVTTL).	1	This pin has an internal 30k pull down to ground. A signal on this pin will not affect module performance
10	VeeR	Receiver Ground	1	Note 5
11	VeeR	Receiver Ground	1	Note 5
12	RD-	Inv. Received Data Out	3	Note 6
13	RD+	Received Data Out	3	Note 6
14	VeeR	Receiver Ground	1	Note 5
15	VccR	Receiver Power	2	3.3 ± 5%, Note 7
16	VccT	Transmitter Power	2	3.3 ± 5%, Note 7
17	VeeT	Transmitter Ground	1	Note 5
18	TD+	Transmit Data In	3	Note 8
19	TD-	Inv. Transmit Data In	3	Note 8
20	VeeT	Transmitter Ground	1	Note 5

### Notes:

- TX Fault is an open collector/drain output, which should be pulled up with a 4.7K - 10KΩ resistor on the host board. Pull up voltage between 2.0V and VccT, R+0.3V. When high, output indicates a laser fault of some kind. Low indicates normal operation. In the low state, the output will be pulled to < 0.8V.
- TX disable is an input that is used to shut down the transmitter optical output. It is pulled up within the module with a 4.7 - 10 K Ω resistor. Its states are:  
 Low (0~0.8V): Transmitter on (>0.8V, <2.0V): Undefined  
 High (2.0~3.465V): Transmitter Disabled  
 Open: Transmitter Disabled.
- Modulation Absent, connected to VEET or VEER in the module.
- LOS (Loss of Signal) is an open collector/drain output, which should be pulled up with a 4.7K - 10KΩ resistor. Pull up voltage between 2.0V and VccT, R+0.3V. When high, this output indicates the received optical power is below the worst-case receiver sensitivity (as defined by the standard in use). Low indicates normal operation. In the low state, the output will be pulled to < 0.8V.
- VeeR and VeeT may be internally connected within the SFP module.
- RD-/+ : These are the differential receiver outputs. They are AC coupled 100Ω differential lines which should be terminated with 100Ω (differential) at the user SERDES. The AC coupling is done inside the module and is thus not required on the host board. The voltage swing on these lines will be between 370 and 2000 mV differential (185 - 350 mV single ended) when properly terminated.
- VccR and VccT are the receiver and transmitter power supplies. They are defined as 3.3V ±5% at the SFP connector pin. Maximum supply current is 300mA. Recommended host board power supply filtering is shown below. Inductors with DC resistance of less than 1 ohm should be used in order to maintain the required voltage at the SFP input pin with 3.3V supply voltage. When the recommended supply-filtering network is used, hot plugging of the SFP transceiver module will result in an inrush current of no more than 30mA greater than the steady state value. VccR and VccT may be internally connected within the SFP transceiver module.
- TD-/+ : These are the differential transmitter inputs. They are AC-coupled, differential lines with 100Ω differential termination inside the module. The AC coupling is done inside the module and is thus not required on the host board. The inputs will accept differential swings of 400 - 2000 mV (200 - 1000mV single-ended) be used for best EMI performance.